



# Large LED Display Solutions For Meeting Rooms and Classrooms




# Interactive Touch Displays

## 65" & 75"

- 4K UHD Resolution (3840 x 2160)
- Anti-Glare & Lightweight
- Wall Mount Included
- Built-in White Board, Wi-Fi, and Web Browser
- Up to 10 Touch Points on Windows
- Multi-Gesture on MAC
- Chromebook Compatible
- Front HDMI & Touch USB Input
- Front Built-In Speakers



Models:  
 TS65M10E 65"  
 TS75M10E 75"

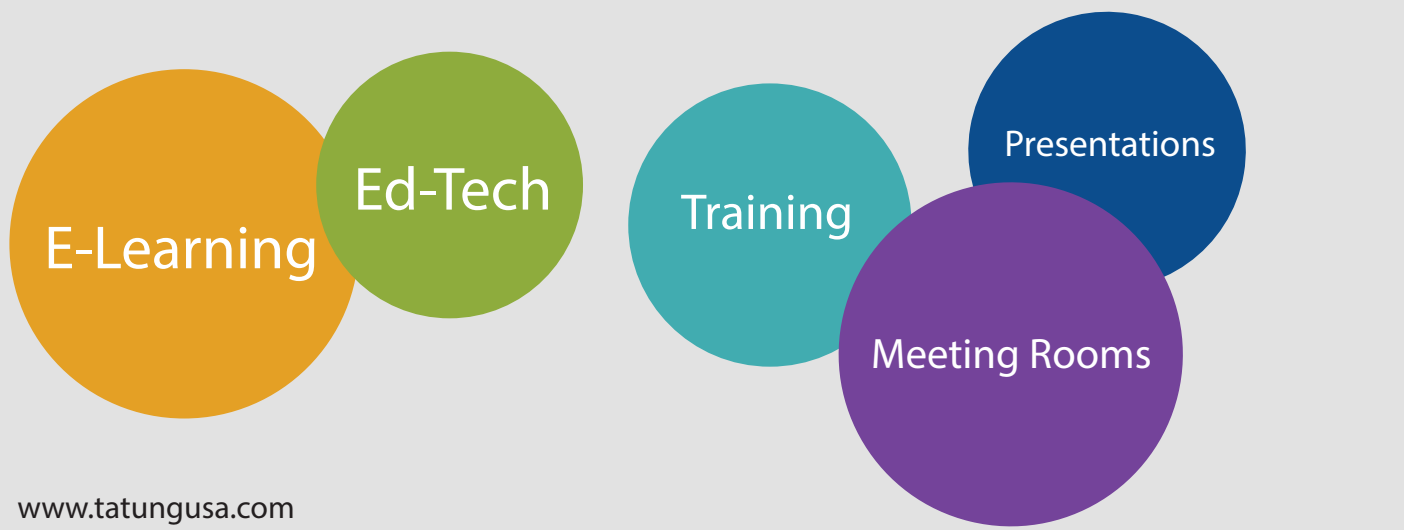

# Commercial Non-Touch Displays



## 75" & 86"

- 4K UHD Resolution (3840 x 2160)
- HDMI In, HDMI Out
- RS32 In, RS32 Out
- Wall Mount Included

Models:  
TME75 75"  
TME86 86"

Commercial  
Grade

Lightweight

## Mobile Stand (Option)



Compatible with  
Tatung's 65" and 75"  
Interactive Touch Displays  
and 75" & 86" Non Touch 4K  
Displays

Model: TS-STAND

# Display Specifications

	65" LED Touch	75" LED Touch	75" LED	86" LED
<b>Model</b>	<b>TS65M10E</b>	<b>TS75M10E</b>	<b>TME75</b>	<b>TME86</b>
<b>Anti-Glare Screen</b>	Yes	Yes	No	No
<b>Resolution</b>	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160
<b>Touch Screen (OS) Support</b>	*Windows 7*, 8, 10 MAC 10.6-10.13 Chromebook	*Windows 7*, 8, 10 MAC 10.6-10.13 Chromebook	Non-Touch	Non-Touch
<b>Windows/Linux Touch Points</b>	*10	*10	N/A	N/A
<b>MAC Touch Points</b>	1	1	N/A	N/A
<b>CPU</b>	ARM A53	ARM A53	ARM A53	ARM A53
<b>Brightness</b>	450 nits	450 nits	450 nits	400 nits
<b>Contrast Ratio</b>	1200:1	1200:1	1200:1	1200:1
<b>Connectivity</b>	HDMI In x 5, HDMI Out, LAN VGA, PC In, SPDIF Component Video In Composite AV In/Out, USB (touch) x5 USB 2.0 (media) x2 USB 3.0 (media) x 2 USB (OPS PC) RS232 In/Out (Control Port) Wifi via USB Dongle	HDMI In x 5, HDMI Out, LAN VGA, PC In, SPDIF Component Video In Composite AV In/Out, USB (touch) x5 USB 2.0 (media) x2 USB 3.0 (media) x 2 USB (OPS PC) RS232 In/Out (Control Port) Wifi via USB Dongle	HDMI (In) x 4 HDMI (Out) x 1 VGA PC Audio (In) YPbPr AV (In) AV (Out) SPDIF (Out) USB x 3 RS232 In / Out, LAN	HDMI (In) x 4 HDMI (Out) x 1 VGA PC Audio (In) YPbPr AV (In) AV (Out) SPDIF (Out) USB x 3 RS232 In / Out, LAN
<b>Panel Life</b>	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
<b>Touch Response Time</b>	10ms	10ms	10ms	10ms
<b>Audio</b>	10 watts x 2	10 watts x 2	10 watts x 2	10 watts x 2
<b>Viewing Angle</b>	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
<b>Power Consumption</b>	<170 watts	<310 watts	400 watts	440 watts
<b>Product Dimensions W/D/H</b>	59.11" x 4.18" x 36.48"	68.38" x 4.37" x 41.56"	67.49" x 3.83" x 39.07"	77.24" x 4.04" x 44.71"
<b>Packaging Dimensions</b>	69.49" x 12.6" x 45.87"	78.35" x 13.78" x 45.87"	78.35" x 12.6" x 45.87"	86.61" x 14.17" x 53.94"
<b>VESA Mounting</b>	400mm x 400mm (M8)	600mm x 400mm (M8)	600mm x 400mm (M8)	700mm x 400mm (M8)
<b>Physical Weight</b>	114 lbs 127 lbs with included mount	128 lbs 141 lbs with included mount	84.99 lbs 97.99 lbs with included mount	142.75 lbs 155.75 lbs with included mount
<b>Packaging Weight</b>	142 lbs	179.74 lbs	128.53 lbs	186.18 lbs
<b>3 Year Warranty</b>	Yes	Yes	Yes	Yes
<b>Accessories</b>	Wall Mount, Remote, Stylus (2) Batteries (2), Power Cord 10ft HDMI Cable 10ft USB Cable CD (touch driver) Wifi Dongle	Wall Mount, Remote, Stylus (2) Batteries (2), Power Cord 10ft HDMI Cable 10ft USB Cable CD (touch driver) Wifi Dongle	Remote Power Cord Wall Mount	Remote Power Cord Wall Mount

Specifications subject to change without notice. Doc#0306.18

Tatung Company of America, Inc. : Display Solutions Division : [www.tatungusa.com](http://www.tatungusa.com)

Tel: 1-800-829-2850 Ext 112 or 111 Email: [interactive@tatungusa.com](mailto:interactive@tatungusa.com)

Follow TatungUSA    